

RXG1490L

Rakon's RXG1490L GHz XO enables output frequencies of up to 2.2 GHz with ultra-low RMS phase jitter (as low as 15 fs typ, 12 kHz to 20 MHz). RXG1490L is an ideal solution for Optical Coherent Networking, and high speed ADC/DAC/SERDES clocking, where excellent oscillator phase noise and jitter is critical to system performance. This product is also available as a VCXO, Rakon RVG1490L.

Features

- Frequency range from 1 GHz up to 2.2 GHz
- Ultra-low RMS phase jitter
- Sinewave, Differential Sinewave or LVPECL
- Lower temperature sensitivity than SAW

Applications

- 100G/400G Data communications
- High speed ADC/DAC/SERDES
- Coherent Optical Modules

14.0 x 9.0 x 3.0mm SMD



Standard Specifications


Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
Frequency		1.0 – 2.2		GHz	Sinewave, Differential Sinewave or LVPECL output type
Operating temperature range	-40		85	°C	
Frequency stability			±70	ppm	Including initial calibration, temperature range, supply variation, load variation and 10 years aging at 25°C
Temperature stability			±20	ppm	Over operating temperature range only
Supply voltage (VDD)		3.3		V	±5%
Supply current			70 80 120	mA mA mA	Sinewave Differential Sinewave LVPECL
Oscillator output					
Sub-harmonics		-30	-25	dBc	
Output power	2	4	6	dBm	Single sinewave, 50Ω load
Output differential swing	0.6		1.6	V	Differential sinewave
Output differential swing	1.1	1.6		V	LVPECL

SSB Phase Noise and RMS Phase Jitter


Offset / Carrier Frequency	1.096GHz LVPECL	2.193GHz Sinewave	Unit	Test Condition / Description
a. 100 Hz	-97	-83	dBc/Hz	Typical at 25°C, VDD 3.3V ±5%
b. 1 kHz	-127	-104	dBc/Hz	
c. 10 kHz	-144	-125	dBc/Hz	
d. 100 kHz	-146	-149	dBc/Hz	
e. 1 MHz	-146	-149	dBc/Hz	
f. 10 MHz	-145	-149	dBc/Hz	
g. Typical RMS phase jitter	46	15	fs	Integrated 10kHz to 20MHz Integrated 12kHz to 20MHz

SSB Phase Noise and RMS Phase Jitter (Typical value at 25°C)

1.096GHz XO with LVPECL Output

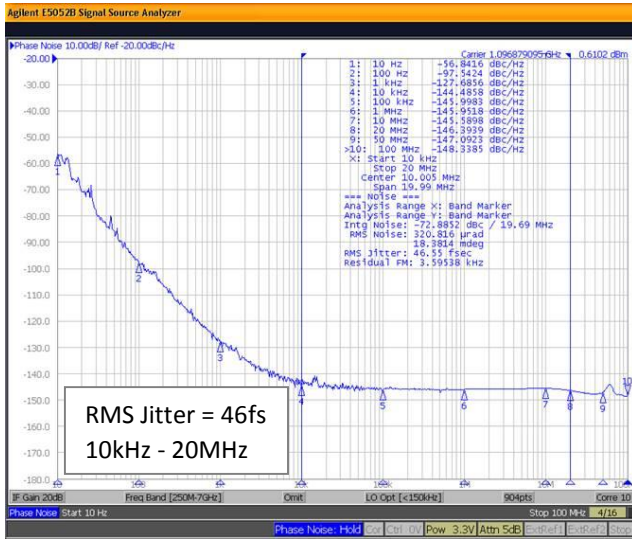

2.193GHz XO with Sinewave Output

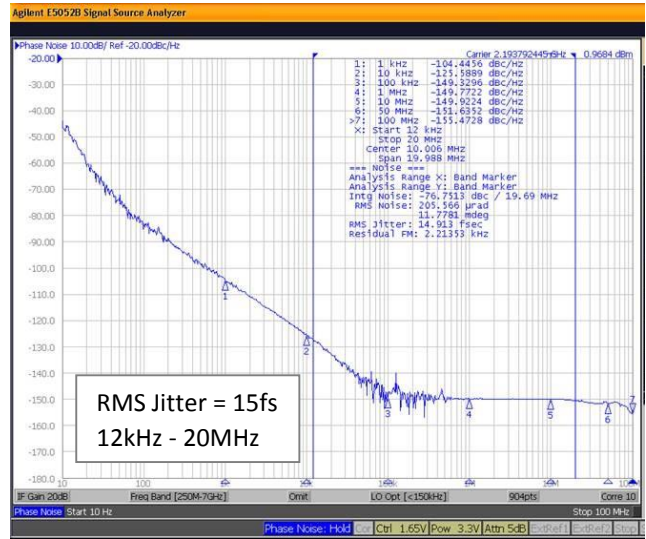

Model Outline and Recommended Pad Layout

TOP VIEW

SIDE VIEW

H* NOTE:

H = 3.3 ±0.2 mm (for LVPECL)
H = 2.8 ±0.2 mm (for Single and Differential Sinewave)

BOTTOM VIEW

PIN CONNECTIONS (XO)

	Sinewave	Differential Sinewave	LVPECL
1	NC	NC	NC
2	GND	GND	GND
3	GND	GND	GND
4	Sinewave Output	Output 1 ($\varnothing = 0^\circ$)	Output 1 (\bar{Q})
5	GND	Output 2 ($\varnothing = 180^\circ$)	Output 2 (Q)
6	VDD	VDD	VDD

RECOMMENDED PAD LAYOUT

UNIT: mm

XO Model Range

Typical RMS Phase Jitter (12kHz-20MHz)				
	1.00ps CMOS, LVPECL, LVDS 8 - 1500MHz	0.50ps CMOS, LVPECL, LVDS 8 - 1500MHz	0.10ps CMOS, LVPECL, LVDS 10 - 800MHz	0.03ps Sine, Differential Sine, LVPECL 1.0 - 2.2GHz
Footprint	14.0 x 9.0mm (1490)			RXG1490L Ultra-low jitter
	7.0 x 5.0mm (7050)	RXO7050R Quick-turn, any frequency	RXO7050P Quick-turn, low jitter	RXO7050M Best-in-class jitter
	5.0 x 3.2mm (5032)	RXO5032R Quick-turn, any frequency	RXO5032P Quick-turn, low jitter	RXO5032M Best-in-class jitter
	2.5 x 2.0mm (2520)	RXO2520R Quick-turn, any frequency	RXO2520P Quick-turn, low jitter	