


RTF3215 - SMD Tuning Fork Crystal



PRODUCT FEATURES:

- Compact, low profile (3.2 x 1.5 x 0.7 mm) and lightweight SMD tuning fork crystal resonator.
- Ceramic package and metal lid assures extreme accuracy and high-reliability through utilising electron beam sealing method.
- Applications: Microprocessors, Mobile Communications, DVC / DSC, SSD / HDD, GPS and General Purpose.

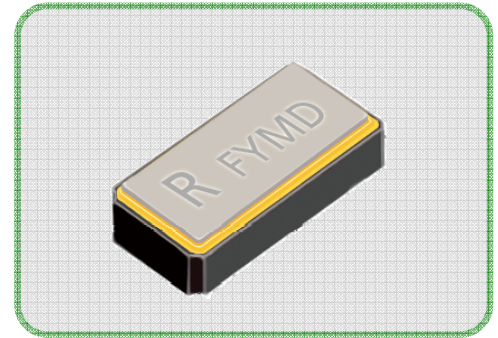

SPECIFICATIONS:



ITEM	SPECIFICATIONS
Nominal frequency (kHz)	32.768
Frequency tolerance at 25°C (ppm)	±10, ±20, ±30, ±50, ±100
Turnover temperature (°C)	25 ± 5
Parabolic coefficient (/°C ²)	-0.03 ± 0.01 x 10 ⁻⁶
Motional capacitance (fF)	3.5 Typ.
Motional resistance (ESR) (kΩ)	70 Max.
Drive level (µW)	0.5 Max.
Load capacitance (pF)	7.0, 9.0 and 12.5
Storage temperature range (°C)	-55 to +125
Operating temperature range (°C)	-40 to 85
Packing unit (pcs/Ø180mm reel)	3000


STANDARD PART:

FREQUENCY TOLERANCE ± 20 ppm	
Part Number	Load Capacitance
508175	7.0 pF
508092	9.0 pF
508023	12.5 pF

NOTE:

- Consult Rakon sales representatives for other specifications.
- All specifications and markings are subject to change without notice.

MODEL OUTLINE

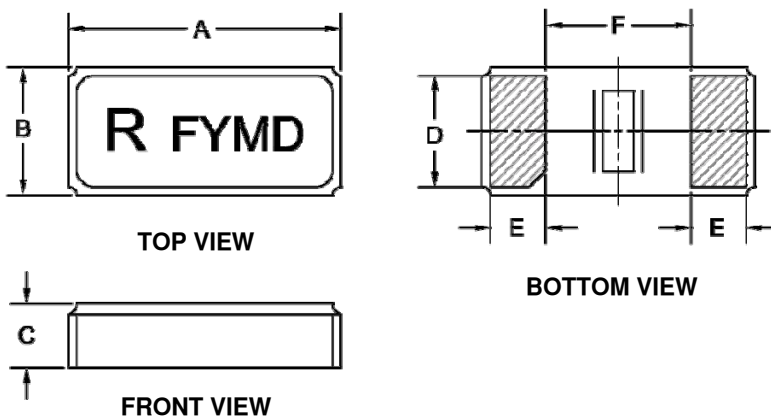

CODE	DIMENSION (mm)
A	3.2
B	1.5
C	0.7
D	1.3
E	0.65
F	1.5
Tolerance	X.X and X.XX = ± 0.1

Rakon Limited

8 Sylvia Park Road, Mt. Wellington, 1060, Auckland, New Zealand
 Telephone: +64 9 573 5554 Facsimile: +64 9 573 5559 Email: sales@rakon.com

Rev. B